

DiamondCare® Recessed Wall Outlet Electrical Accessories

SPECIFICATION

Electrical Accessories

Electrical Accessories for the DiamondCare® Recessed Wall Outlet are suitable for the services listed in the table below. Each module consists of a rough-in and a finished assembly.

Rough-In Assembly

The rough-in assembly consists of a galvanized 4" square x 2" deep electrical box attached to a 16-gauge steel mounting plate with yellow chromate on zinc plating. Attached to the front of the mounting plate is a galvanized 5/8" raised single device cover. The rough-in assembly uses a modular design to permit on site ganging of multiple electrical accessories and/or Beacon Medical gas outlets in any order on 5" centerline spacing.

Finished Assembly

The finished assembly consists of the following:



- A painted, steel finish plate
- A powder-coated, light neutral, zinc die-cast faceplate
- The appropriate electrical device as indicated

Any combination of DiamondCare® Recessed Wall medical gas, slides, and electrical accessories can be ganged on the job site by the installing contractor. When ganged, they are aesthetically compatible, giving the appearance of a console.

Features

The modular design permits medical gas outlets, slides, and electrical accessories to be assembled in any sequence on the job site.

All wiring devices are listed by Underwriters Laboratories, Inc.® and the receptacles are hospital-grade.



t009b001

Ordering Information



DiamondCare® Recessed Wall Outlet Electrical Accessories are finished assemblies that can be shipped at a later date, or you can store them for later installation, so there is less chance of being misplaced, damaged, or lost. For more information, contact BeaconMedaes Customer Service at 1-888-4MEDGAS (463-3427).

DiamondCare Electrical Accessory	Finish Assembly	Rough-in Assembly
125V Duplex, 20A, Ivory	<input type="checkbox"/> 675E01	<input type="checkbox"/> 120968-00
125V Duplex, 20A, Red	<input type="checkbox"/> 675E02	<input type="checkbox"/> 120968-00
Ceiling Power Drop, Straight Blade, 20A (Standard length is 72")*	<input type="checkbox"/> 4107 2011 68	<input type="checkbox"/> 120968-00
Ceiling Power Drop, Twist Lock, 20A (Standard length is 72")*	<input type="checkbox"/> 4107 2011 69	<input type="checkbox"/> 120968-00
Switch, Toggle	<input type="checkbox"/> 675E03	<input type="checkbox"/> 120968-00
Switch, Decora®	<input type="checkbox"/> 675E04	<input type="checkbox"/> 120968-00
Switch, Low Voltage	<input type="checkbox"/> 675E05	<input type="checkbox"/> 120968-00
Blank Provision	<input type="checkbox"/> 675E06	<input type="checkbox"/> 120968-00
Outlet-GFCI, Ivory	<input type="checkbox"/> 675E07	<input type="checkbox"/> 120968-00
Outlet-GFCI, Red	<input type="checkbox"/> 675E08	<input type="checkbox"/> 120968-00


* Recommended height above the finished floor is 76" (193 cm). For lengths other than 72", contact factory.

Product Dimensions

Wall mounted accessories

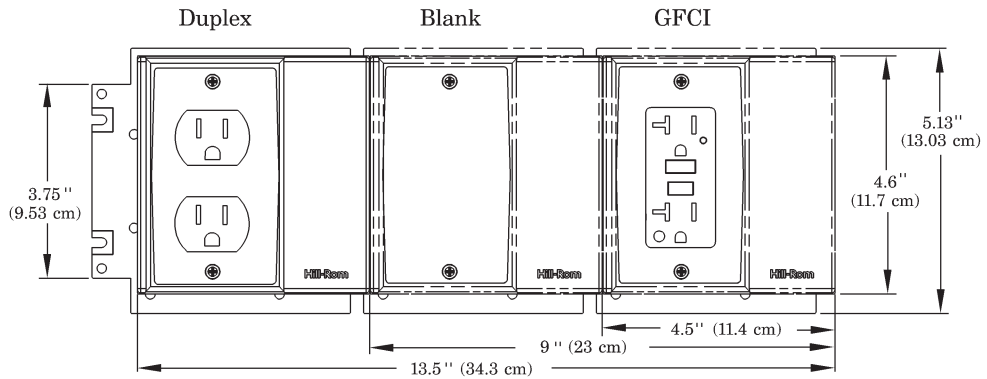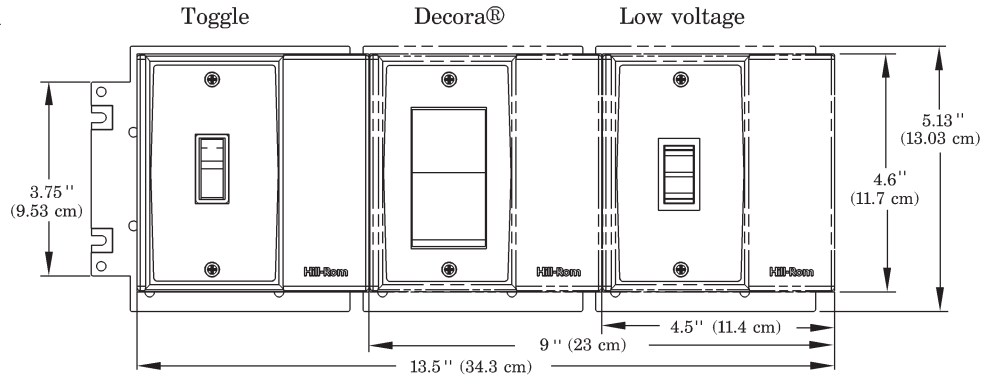

Ceiling mounted power drops

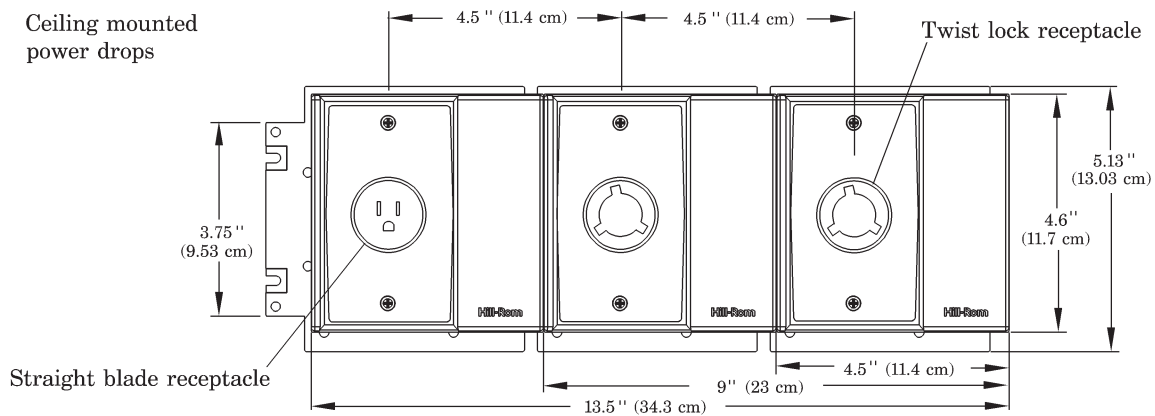

Decora® is a registered trademark of Leviton Manufacturing Co., Inc.

t009b002