

## Lifeline® Lubricated Rotary Vane Medical Vacuum Single Point Connection (SPC) Quadruplex System (5 - 25 HP)

### SPECIFICATION

#### Single Point Connection (SPC) System Design

The LifeLine® Lubricated Rotary Vane Medical vacuum package is fully compliant with NFPA 99 and features a common base with single point connections for the electrical panel and intake. Each pump and the receiver are connected to a common intake manifold. The system is capable of access through a standard 34.5" doorway. Designed and manufactured with ISO 13485 processes, each system is completely tested before shipment and includes:

- Four oil-sealed rotary vane vacuum pumps with four motors
- Integral pre-wired control panel
- Vertical air receiver with full-size three-valve bypass system sized for appropriate demand
- OSP-322-10 seismic pre-certification rating of 2.50  $S_{DS}$  for VLS05Q-VLS10Q, and rating of 1.60  $S_{DS}$  for VLS15Q-VLS25Q.

#### Vacuum Pump

Each pump is a direct driven, oil-sealed rotary vane vacuum pump, with an end (ultimate) vacuum of 29.3" Hg. Each pump is completely air-cooled with no water requirements. Each pump contains:

- Integral, fully recirculating oil supply to provide lubrication
- An automotive-type, spin-on oil filter for oil filtration
- High-discharge temperature switch
- Oil drain valve assembly with temperature gauge

The oil separation system is integral and consists of the following:

- No less than three stages of internally installed oil and smoke eliminators through which the exhaust gas stream must pass
- Bulk separation, oil mist elimination, and smoke elimination
- Capability to remove 99.9+ percent of all oil and smoke particles from the exhaust gas stream

Each vacuum pump includes the following:

- Built-in, anti-suck-back valve mounted at the pump inlet
- Three non-metallic, non-asbestos vanes, each having a minimum life of 30,000 hours
- Mounting on vibration isolators
- Flexible connector and isolation valve

#### Vacuum Pump Drive

The pump shall be direct driven. Torque is transmitted from the motor to the pump through a shaft coupling.

#### Vacuum Pump Motor

Motors are continuous duty, NEMA rated, C-face, foot-mounted, TEFC, suitable for 230/460 or 208V, 60 hertz, 3-phase electrical service and 380V, 50 hertz, 3-phase electrical service.

#### Vacuum Filtration per NFPA 99

A HEPA inlet air filter, 0.3 micron, 99.97% efficiency, is mounted before each vacuum pump. A clear, glass collection canister is mounted below each HEPA filter, with quarter turn valve to isolate canister from filter during service. The inlet filter canister contains a bleed valve to relieve vacuum before servicing.

#### Intake Piping

Each vacuum pump has a factory piped intake with integral flex connector, isolation valve, and check valve. Interconnecting piping consists of powder-coated steel tubing and flanges.

#### Vacuum Receiver

The vacuum receiver is ASME Code stamped, and rated for a minimum 150 PSIG design pressure. The receiver has a full-size three-valve bypass system to allow for draining of the receiver without interrupting the vacuum service. A manual drain is provided on the receiver.

#### Exhaust Piping

Each vacuum pump is factory piped with an integral flex connector to an exhaust manifold with a drip leg and ball valve for condensate drain. Interconnecting piping consists of powder-coated steel tubing and flanges.

#### TotalAlert 360 Control System

The quadruplex mounted and wired TotalAlert 360 control system is U.L. labeled. The control system provides automatic lead/lag sequencing and automatic alternation of vacuum pumps based on first-on/first-off principle with provision for simultaneous operation if required. Automatic activation of reserve unit, if required, will activate an audible alarm as well as a visual alarm on the display screen.

Additional components include:

- NEMA 12 control panel enclosure
- Circuit breaker disconnects for each motor with external operators
- Full voltage motor starters with overload protection
- 24V control circuit
- 65kAIC SCCR rating for control cabinet


The touch screen controls feature a 10" color, high resolution screen. Screen displays and functions include:

- Easy to read system vacuum level
- Status of all units (Running, Available, Off, next to Run)
- Trend graphs for vacuum level and units running
- Run time hour meters for each unit
- Visual/audible alarm indications with isolated contacts for all standard remote alarms
- Event log recording alarms and system activity
- Service alerts
- Event log recording service warnings and service history
- Integral cellular connectivity to MyMedGas, allowing electronic notifications of alarms and warnings
- Daily rounds uploadable to MyMedGas
- BTL listed, BACnet/IP communication



## Standard Configuration

Model Shown: 7.5 Hp Quadruplex

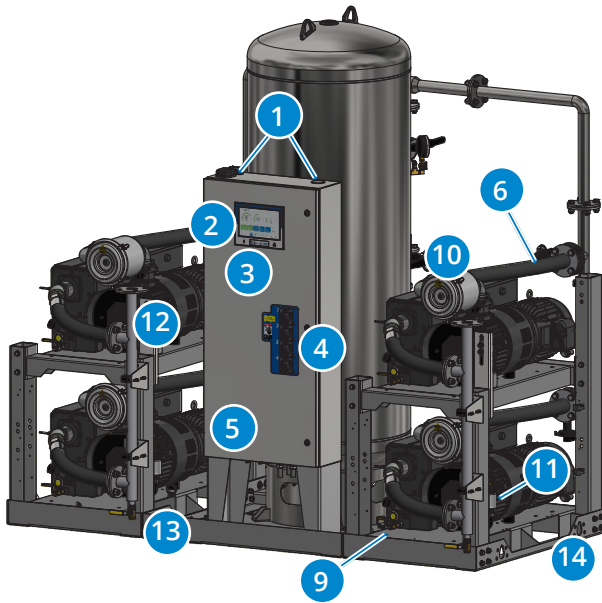

1

Control panel pre-drilled for power and alarms for easy electrical installations. Ethernet connection on panel top for easy installation of BACnet connectivity, with additional connection on the side panel for software updates.

2

TotalAlert 360 controls featuring 10" color screen with high resolution 1280 x 800 Capacitive Touch Display for exceptional clarity, visibility, and useability.

3

LED indication of Reserve in Use condition as backup annunciation to display failure and LED indication of power to the control panel.

4

Through the door disconnects for pumps add to safety during service.

5

Control cabinet components achieve rating of 65kAIC SCCR.

6

Flex connectors on vacuum inlet and discharge to isolate pump vibration from facility pipeline.

7

Vacuum switch as backup to vacuum transducer. In case of transducer failure, system operates effectively.

8

Full-size 3-valve receiver bypass with flanged valves reduce potential leak points over NPT fittings.

9

Oil sight glass and filler plug with ease of access for oil changes.

10

Individual HEPA air inlet filter per vacuum pump to prevent contaminants from entering vacuum pump, ensuring safety during servicing. Housing bleed valve to remove vacuum for filter replacement.

11

Glass collection canister mounted below HEPA filter, with isolation valve to allow for easy changeout.

12


Discharge manifold with a single point connection to the exhaust piping, with flex hoses factory installed.

13

Factory installed exhaust drip leg with ball valve and condensate drain.

14

Openings in base frame to allow access underneath pumps for pump maintenance.

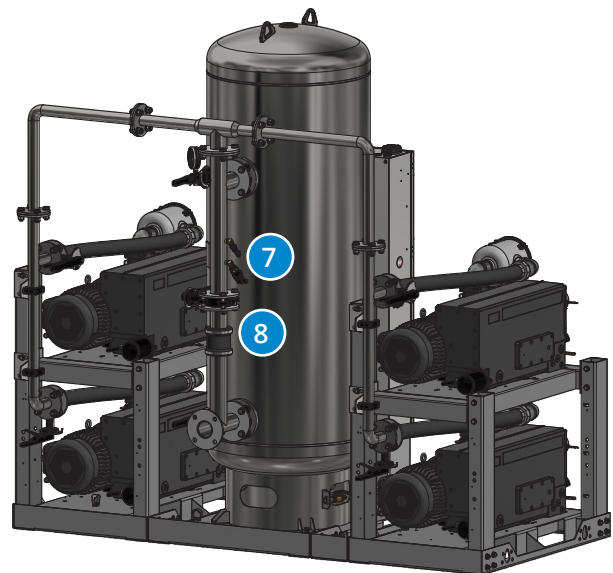

## **TotalAlert 360 Control System**



## **TotalAlert 360 Touch Screen**

- 10" LCD 1280 x 800 Capacitive Touch Display for exceptional clarity and visibility, with enhanced user experience
- LCD is IPS-TFT for enhanced color and contrast, featuring 85% viewing angle in all directions
- Toolbars on all screens with easy access navigation icons that enable full access with minimal touches

## **MyMedGas Connectivity**

- Cellular connectivity to cloud-based MyMedGas web page for remote operator to view system controls and display information
  - » View remotely system operation details, alarms and event history
  - » View remotely maintenance timers, service history logs
  - » Easily download system trends, event logs and reports for system management and record keeping
- Electronic notification
  - » Allows for remote alerts of alarm and warning conditions
  - » Allows for remote alerts of routine maintenance
- Logging rounds to MyMedGas
  - » Main screen touchpoint for MyMedGas with time stamp to log operating conditions, system parameters during daily rounds
  - » Automated report generated to MyMedGas

## **Ethernet Connectivity**

- Control panel contains Ethernet port on top of cabinet for easy installation of BACnet
- TCP/IP protocol for BACnet activation
- Ethernet port on side of control cabinet that allows reprogramming with a standard computer for software updates

## **Control Cabinet Safety**

- Volt free relay contacts for all standard alarms
- Low voltage (24V) control circuit
- Full voltage motor starters with overload protection
- Circuit breaker disconnects for each vacuum pump
- 65kAIC SCCR rating

## **Redundancy**

- Each vacuum pump has an individual board for control allowing units to function independently
- In unlikely malfunction of display board or display screen, system will function normally and activate alarm
- If master board malfunctions, system goes to failsafe operation with backup vacuum switch
- Independent LED indicators on control screen for Reserve in Use and power to the control panel as backup annunciation to display failure

## **Master Display Screen**

- Main Screen
  - » Displays the system operating conditions, including system vacuum level
  - » Displays the pump unit sequence, including status of pumps (running, available, off) and next to start
- Trends & Graphs
  - » Shows measured values of the system operating conditions over a period of time (operating vacuum, ambient temperature)
  - » Shows unit usage and operation, clearly identifying each unit and its running status
  - » Selectable time periods consist of 60 minutes, 4 hours, 24 hours, and 6 days
  - » Visually precise with green and red shading for normal and non-normal areas
- Service
  - » Displays ambient temperature in the room
  - » Maintenance screen shows suggested and required maintenance items with resettable timers
  - » Historical event log records all service activities
  - » Link to operations manuals associated with system
- Alarms and Shutdowns
  - » All system/unit Alarms and Shutdowns displayed with visual indication (Green or Red) and unit operation status, allowing for quick identification and evaluation of system operation
  - » Custom messaging for each alarm and shutdown
  - » Testing mode enables operator to test all alarm/shutdown events (password protected), with all test events recorded in the event log
  - » Event History Log records all system event history
- Unit Operation
  - » Screens shows the operation mode of the unit along with automatic or manual mode setting
  - » Unit status screen displays the running hour meter values, including average daily run time and average starts/hour
  - » Pump rotation allows the unit to run for a short period to check pump rotation
- System Settings
  - » Allows the adjustment of system pressure operating range
  - » Displays pertinent system model information

**SPECIFICATION TABLE**





Vacuum System Specifications <sup>1</sup>										
System Model No.	HP	Capacity <sup>2</sup> @19" Hg (scfm)		System <sup>3</sup> BTU/Hr	Receiver (gallons)	Noise <sup>4</sup> Level	System FLA			System Weight (lbs)
		Pump	System				208V	230V	460V	
SPC Quadruplex - 60 Hz										
VLS05Q-200V-Q	5	37	111	30,540	200	75.8	62.0	54.1	27.4	2,895
VLS05Q-240V-Q	5	37	111	30,540	240	75.8	62.0	54.1	27.4	2,974
VLS07Q-200V-Q	7.5	52	156	45,810	200	83.8	96.4	89.7	45.2	3,631
VLS07Q-240V-Q	7.5	52	156	45,810	240	83.8	96.4	89.7	45.2	3,706
VLS10Q-200V-Q	10	77	231	61,080	200	85.8	136.4	107.3	54.0	4,603
VLS10Q-240V-Q	10	77	231	61,080	240	85.8	136.4	107.3	54.0	4,678
VLS15Q-200V-Q	15	111	333	91,620	200	87.8	202.8	152.1	76.4	8,575
VLS15Q-240V-Q	15	111	333	91,620	240	87.8	202.8	152.1	76.4	8,650
VLS20Q-200V-Q	20	137	411	122,160	200	88.8	250.8	210.5	105.6	9,255
VLS20Q-240V-Q	20	137	411	122,160	240	88.8	250.8	210.5	105.6	9,330
VLS25Q-200V-Q	25	168	504	152,700	200	89.8	290.8	250.5	125.6	10,090
VLS25Q-240V-Q	25	168	504	152,700	240	89.8	290.8	250.5	125.6	10,166
SPC Quadruplex - 50 Hz							380V			
VLS05Q-200V-QE	5	31	93	30,540	200	75.8	33.0			2,895
VLS05Q-240V-QE	5	31	93	30,540	240	75.8	33.0			2,974
VLS07Q-200V-QE	7.5	43	129	45,810	200	83.8	47.6			3,631
VLS07Q-240V-QE	7.5	43	129	45,810	240	83.8	47.6			3,706
VLS10Q-200V-QE	10	64	192	61,080	200	85.8	55.2			4,603
VLS10Q-240V-QE	10	64	192	61,080	240	85.8	55.2			4,678
VLS15Q-200V-QE	15	93	279	91,620	200	87.8	91.2			8,575
VLS15Q-240V-QE	15	93	279	91,620	240	87.8	91.2			8,650
VLS20Q-200V-QE	20	114	342	122,160	200	88.8	114.0			9,255
VLS20Q-240V-QE	20	114	342	122,160	240	88.8	114.0			9,330
VLS25Q-200V-QE	25	140	420	152,700	200	89.8	150.0			10,090
VLS25Q-240V-QE	25	140	420	152,700	240	89.8	150.0			10,166

**Specification Table Notes:**

1. Normal operating conditions at a maximum ambient of 105° F. Consult factory for higher ambient conditions.
2. All capacities are shown as NFPA 99 system capacities (reserve vacuum pump on standby).
3. All system BTU/HR are shown with reserve vacuum pump on standby.
4. All noise levels are shown in dB(A) and reflect reserve pump on standby.

### Standard Configuration

Model Shown: 7.5 Hp Quadruplex

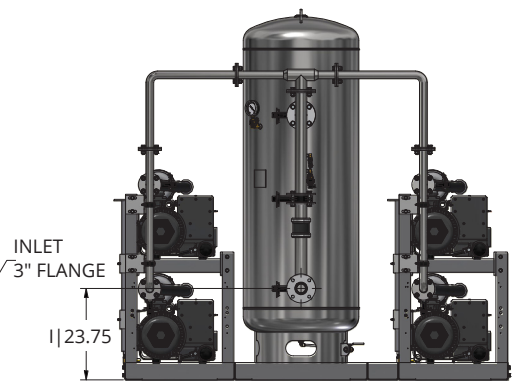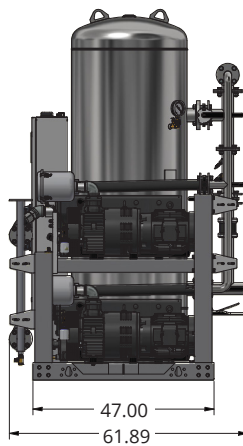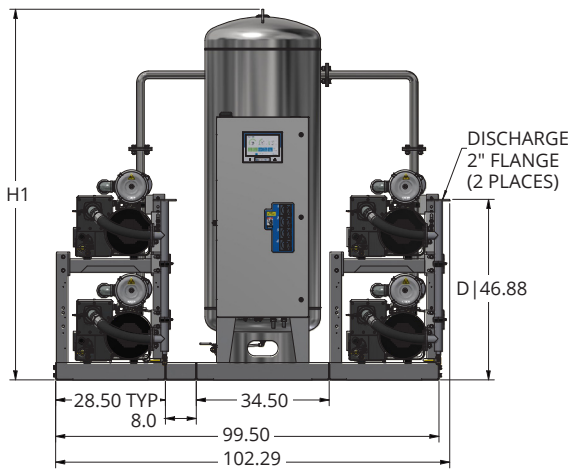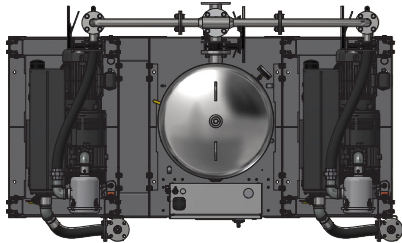





System Model No.	HP	Dimensions
		H1
VLS05Q-200V-Q	5	84.22
VLS05Q-240V-Q	5	96.22
VLS07Q-200V-Q	7.5	84.22
VLS07Q-240V-Q	7.5	96.22

### Notes:

- Allow 36 inches in front of control panel for maintenance and ventilation, all other sides require 24 inches of clearance
- Additional drawings/diagrams available for download at [www.beaconmedaes.com](http://www.beaconmedaes.com).

### Standard Configuration

Model Shown: 10 Hp Quadruplex

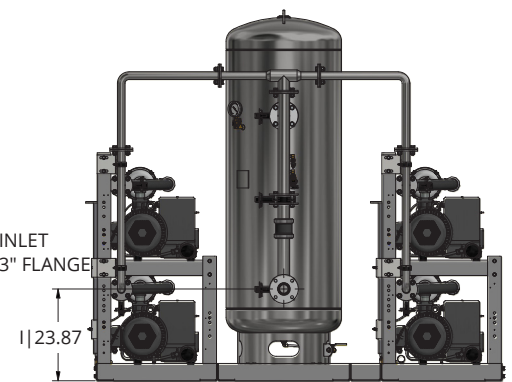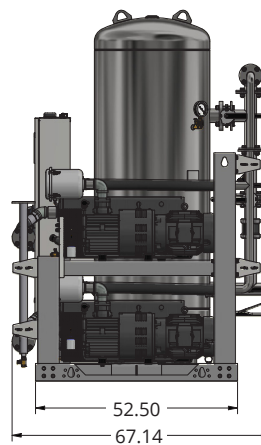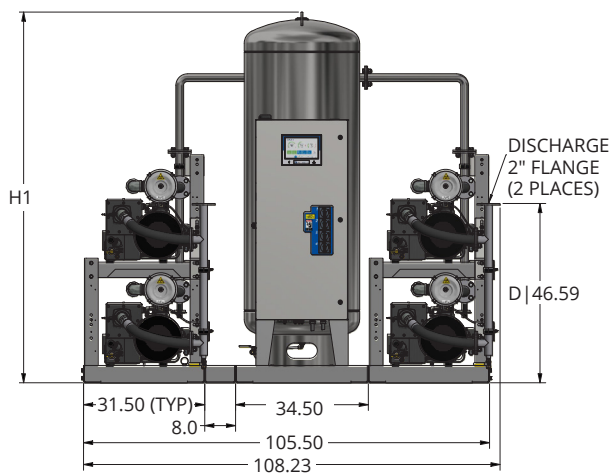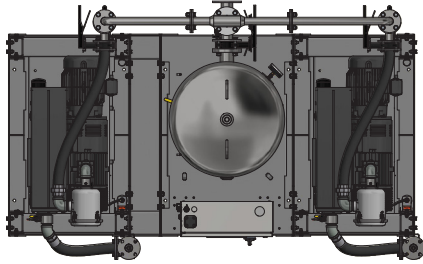

System Model No.	HP	Dimensions
		H1
VLS10Q-200V-Q	10	84.35
VLS10Q-240V-Q	10	96.34





### Notes:

- Allow 36 inches in front of control panel for maintenance and ventilation, all other sides require 24 inches of clearance
- Additional drawings/diagrams available for download at [www.beaconmedaes.com](http://www.beaconmedaes.com).



### Standard Configuration

Model Shown: 25 Hp Quadruplex

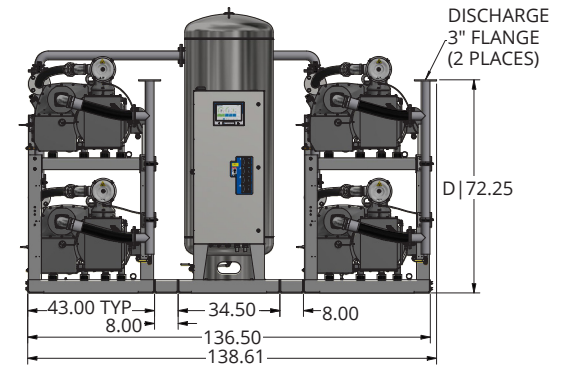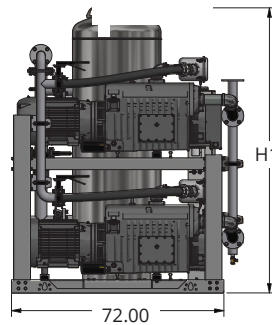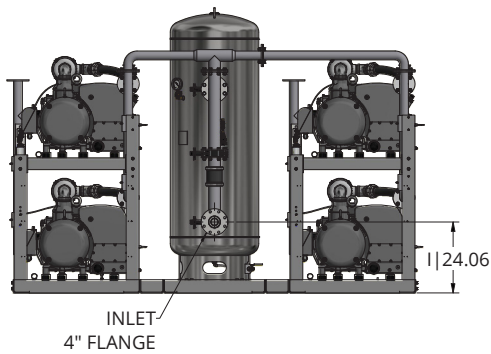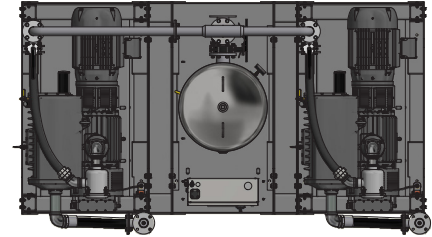

System Model No.	HP	Dimensions
		H1
VLS15Q-200V-Q	15	84.62
VLS15Q-240V-Q	15	96.62
VLS20Q-200V-Q	20	84.62
VLS20Q-240V-Q	20	96.66
VLS25Q-200V-Q	25	84.62
VLS25Q-240V-Q	25	96.66

### Notes:

- Allow 36 inches in front of control panel for maintenance and ventilation, all other sides require 24 inches of clearance
- Additional drawings/diagrams available for download at [www.beaconmedaes.com](http://www.beaconmedaes.com).

*Life is in the details.®*