



UTS Series Ultra High Purity, Two-Stage, Stainless Steel Bar Stock, Cylinder Regulator

SPECIFICATION

Applications

Non-corrosive or corrosive gases

- Type 316L stainless steel body

Low flow applications

- Cv of 0.06

Consistent delivery pressure regardless of cylinder pressure

- Two stage regulator

Recommended for gas purity up to Grade 6.0 (99.9999% pure)

- Metal to metal diaphragm to body in a bar stock body regulator

Designed for use with gas cylinders

- Directly mounted to the cylinder valve with gas related gas cylinder & nipple



Key Features

Stainless steel diaphragm

- Eliminates “off gassing” associated with neoprene diaphragm into the gas stream

One-piece encapsulated seat design

- Ease of maintenance and ease of cleaning

Tamper-proof self re-seating internal valve

- Maintains regulator integrity and reduces maintenance

Stainless bar stock body

- Designed to 1 x 10⁻⁹ cc/sec. inboard helium leak rate to maintain gas purity levels

Easy panel mounting

- Front panel mountable (panel mounting ring optional)

Seat assembly with built-in filter

- Traps foreign matter thus extending regulator life and reduces maintenance

Ordering Information



Part Number Matrix - UTS

A	
GAS	INSCRIBE
Air- compressed	CGA 346
Argon	CGA 580
Argon mix	CGA 580
Carbon dioxide*	CGA 320
Helium	CGA 580
Hydrogen	CGA 350
Argon/methane	CGA 350
Nitrogen	CGA 580
Air - industrial	CGA 590
Nitrous oxide*	CGA 326
Oxygen	CGA 540
Other gas; provide CGA number	


B	
DELIVERY PRESSURE	INSCRIBE
1-15 psi (0-30 psi gauge)	15
5-50 psi (0-100 psi gauge)	50
30-125 psi (0-200 psi gauge)	125
50-250 psi (0-400 psi gauge)	250
100-500 psi (0-1000 psi gauge)	500
C	
OUTLET ASSEMBLY	INSCRIBE
1/4" F.NPT	4FS
1/4" M.NPT	4MS
Diaphragm Valve	DVS
1/8" Compression SS	CS2
1/4" Compression SS	CS4

D	
OPTIONS	INSCRIBE
Panel Mounting Ring	PMR
Pressure Relief Valve	PRV
E	
COUNTRY	INSCRIBE
USA	Leave blank
Germany	DIN
United Kingdom	BS
France	AFNOR
Italy	UNI
Argentina	IRAM
Australia & New Zealand	AS
Brazil	ABNT
Netherlands	NEN
Spain	ITC

* For carbon dioxide and nitrous oxide service, it is strongly recommended to use electrically heated regulators. Should flow of carbon dioxide or nitrous oxide exceed 35 SCFH, regulator will freeze up and warranty will be null & void.

Dimensions


Approximate dimensions

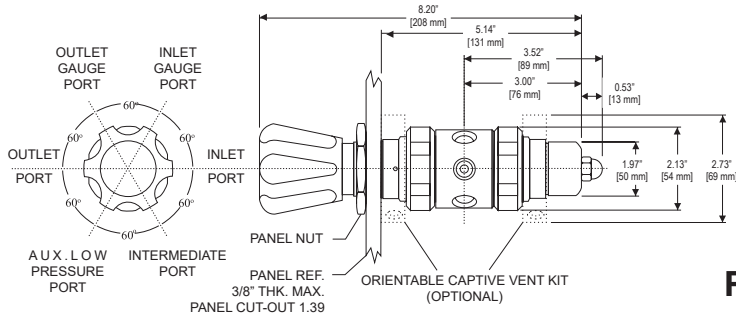


Specifications	
Maximum Inlet Pressure	3000 psig [207 barg]
Flow Coefficient	Cv = 0.06
Operating Temperature	-40°F to 140°F [-40°C to 60°C]
Gauge Diameter	2" [51 mm] dial
Inlet Gauge Range	0-4000 psig [0-276 barg]
Delivery Pressures and Related Gauges	See Part Number Matrix

Materials	
Regulator	
Body	316L Stainless Steel Bar Stock
Bonnet	Chrome-plated Brass Bar Stock
Diaphragm	316L Stainless Steel
Nozzle	316L Stainless Steel
Seat and Seals	PTFE Teflon
Filter	Sintered Stainless Steel - 10 micron
Seat Return Spring	316L Stainless Steel
Adjusting Knob	ABS Plastic
Diaphragm Valve (if selected)	
Body	316 Stainless Steel
Diaphragm	316 Stainless Steel
Seat	PCTFE (Kel-F™)
Knob	Black Phenolic
Gas Cylinder Connection	
Nut & Nipple	316 Stainless Steel

Flow Data

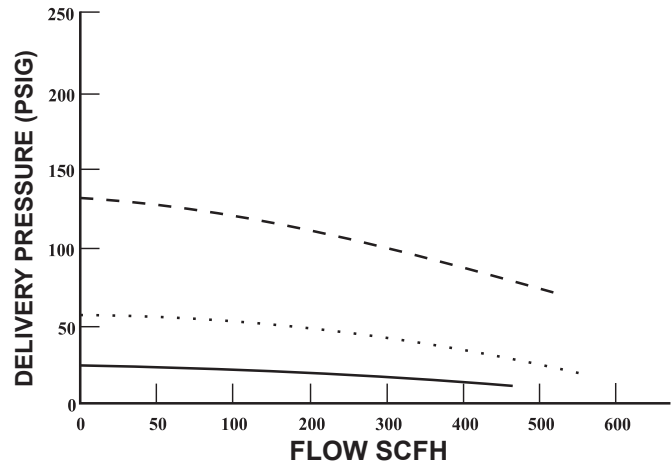

15 PSIG OUTLET @ 200 PSIG INLET —————
 15 PSIG OUTLET @ 200 PSIG INLET
 15 PSIG OUTLET @ 200 PSIG INLET - - - - -

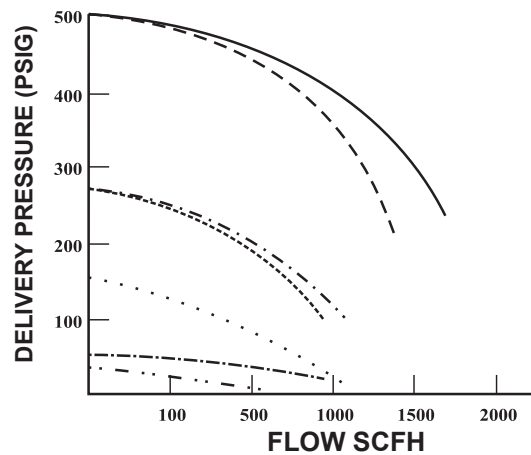

15 PSIG OUTLET @ 2000 PSIG INLET - - - - -
 50 PSIG OUTLET @ 2000 PSIG INLET - - - - -
 125 PSIG OUTLET @ 2000 PSIG INLET
 250 PSIG OUTLET @ 350 PSIG INLET
 250 PSIG OUTLET @ 2000 PSIG INLET - - - - -
 500 PSIG OUTLET @ 600 PSIG INLET - - - - -
 500 PSIG OUTLET @ 2000 PSIG INLET —————