



## NOTES:

- 1. ALL INTERCONNECTING PIPE AND FITTINGS SHALL BE INSTALLED BY THE CONTRACTOR.
- 2. PIPING LAYOUT IS DIAGRAMMATIC ONLY. FINAL ARRANGEMENT WILL BE SITE SPECIFIC. CONTRACTOR WILL BE RESPONSIBLE FOR FIELD VERIFICATION AND COORDINATING ACTUAL LOCATION WITH ALL OTHER TRADES.
- 3. CONTRACTOR SHALL VERIFY MOTOR VOLTAGE, PHASE AND AMP RATINGS BEFORE STARTING ELECTRICAL INSTALLATION; AND MAKE CERTAIN THE VOLTAGE SUPPLIED BY THE FACILITY IS THE SAME.
- 4. THE ROOM REQUIRES DEDICATED MECHANICAL VENTILATION WITH AN ALLOWABLE TEMPERATURE VARIANCE OF 40° TO 105°F. (FOR HIGHER AMBIENTS, CONSULT FACTORY)
- 5. ALL ACCESSORIES, PIPE AND FITTINGS, EXCEPT DISCHARGE SILENCERS, BEYOND INLET AND DISCHARGE PORTS ARE SUPPLIED AND INSTALLED BY OTHERS.
- 6. ALLOW 36 INCHES IN FRONT OF CONTROL PANEL FOR MAINTENANCE AND VENTILATION, ALL OTHER SIDES REQUIRE 24 INCHES OF CLEARANCE.
- 7. WHEN DETERMINING THE TOTAL PIPE LENGTH, AND ALL THE STRAIGHT LENGTHS OF PIPE TOGETHER IN ADDITION TO THE NUMBER OF ELBOWS TIMES THE EFFECTIVE PIPE LENGTH FOR THAT PIPE SIZE. (SEE EQUIVALENT PIPE LENGTH TABLE & EXAMPLE CALCULATION IN THE O&M MANUAL)

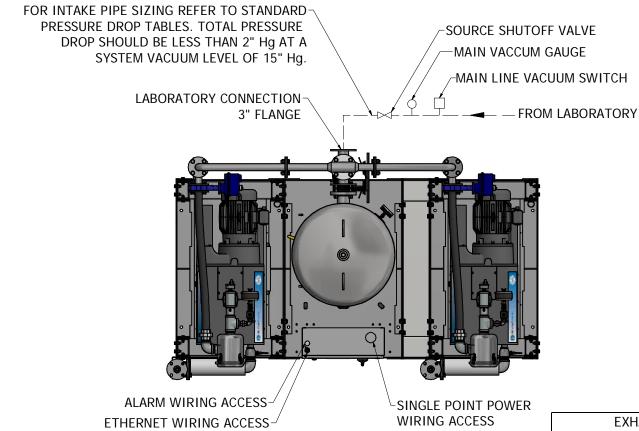

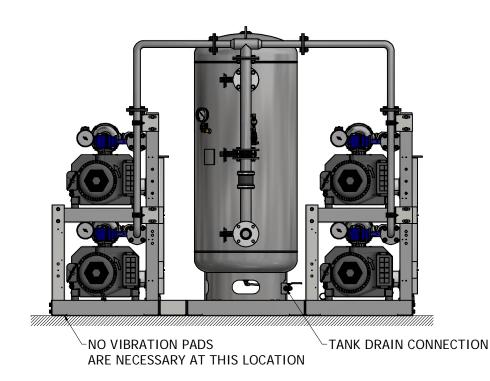

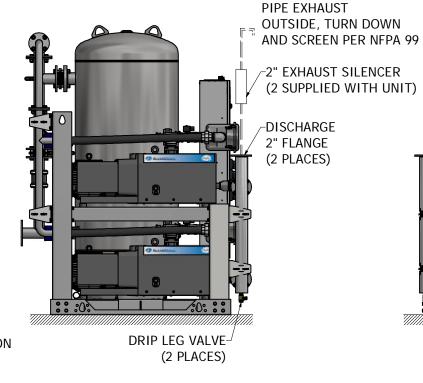

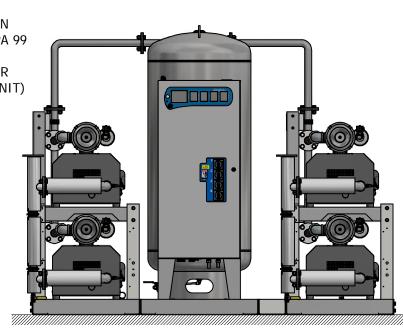

NO FOUNDATION OR INERTIA PAD IS REQUIRED (HOUSEKEEPING PAD IS OPTIONAL)

EXHAUST PIPE SIZE TABLE						
(SEE NOTE 7)						
UNIT SIZE	PIPE LENGTH					
	0-75'	76'-350'	351'-500'			
QX 6.4	3.00" NPT	4.00" NPT	5.00" NPT			
UNIT SIZE	PIPE LENGTH					
	0-200'	201'-500'				
QX 7.5	4.00" NPT	5.00" NPT				
UNIT SIZE	PIPE LENGTH					
	0-150'	151'-500'				
QX 8.7	4.00" NPT	5.00" NPT				

EFFECTIVE PIPE LENGTH FOR ELBOWS							
PIPE SIZE (IN)	3.00" NPT	4.00" NPT	5.00" NPT				
EFF. PIPE LENGTH (FT)	7.9	10	11.9				

Revised: MDB	Date: D 07/10/2019	awn: MDE	3		Date:	11/13/2017
BEACONMEDÆS	remain the property of be used for other than loaned without the expi	This drawing and the information contained thereon remain the property of BeaconMedaes and may not be used for other than the purpose for which it is loaned without the expressed written permission from BeaconMedaes Engineering.				
Description: INSTALLATION DIAGRAM LAB 6.4-8.7HP QX CLAW VAC SPC		Part Number: 4107 8563 06				
		DN: BM190348				Rev: 01
STANDARD & (	D2 ASSURED	Sheet	1 0	of 1		SCALE THIS JMENT

(8.7HP WITH 200 GALLON RECEIVER SHOWN)