




Gas Stick for General Purpose Applications PGS200 Series

SPECIFICATION

Gas Stick for General Purpose Applications

This equipment is designed to reduce the gas distribution pipeline to the desired pressure required at the point of use. It is equipped with an inlet ball valve, a pressure reducing regulator and a delivery pressure gauge mounted on a painted steel panel. This gas stick is designed for use with non-corrosive gases with a maximum inlet pressure of 200 psig [13.8 Barg] with Cv = 0.17. Each panel will come identified with a color-coded gas label.

Technical Data	
Maximum Inlet Pressure	200 psig [13.8 BARG]
Materials of Construction	Chrome-Plated Brass
Cleaning	Cleaned for Oxygen Service

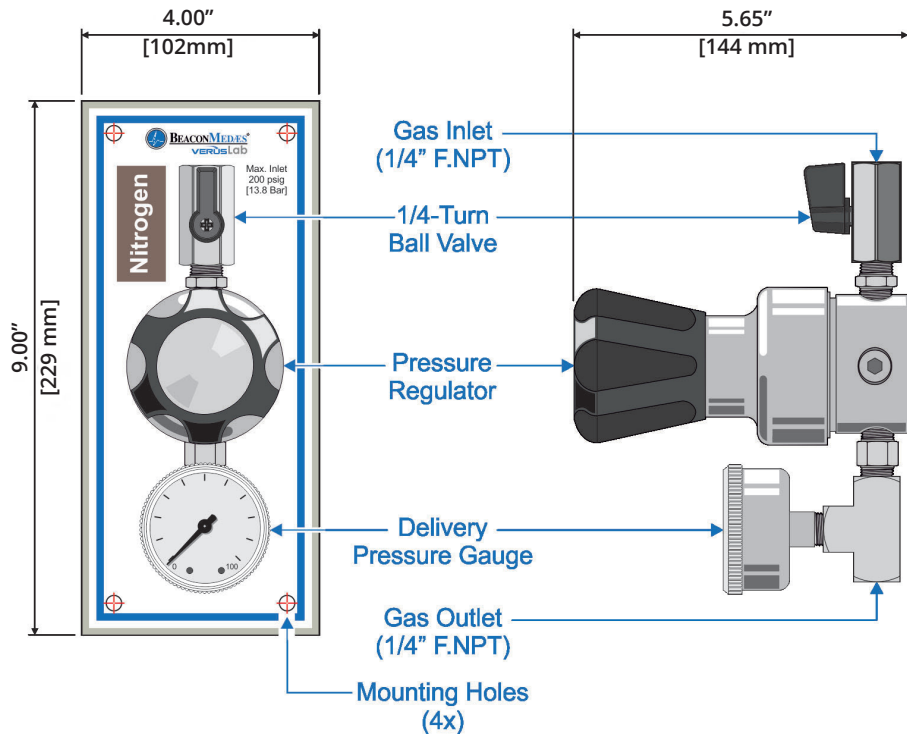

Ordering Information

PGS200B - -
A B

Part Number Matrix - PGS200B

A	
GAS SERVICE	INSCRIBE
Air	CGA 346
Argon	CGA 580A
Carbon Dioxide	CGA 320
Helium	CGA 580H
Hydrogen	CGA 350H
Methane	CGA 350M
Nitrogen	CGA 580N
Nitrous Oxide	CGA 326
Oxygen	CGA 540

B	
DELIVERY PRESSURE	INSCRIBE
1-15 psig	15
5-50 psig	50
30-125 psig	125