Notes:


- 1. ALL INTERCONNECTING PIPE AND FITTINGS SHALL BE INSTALLED BY THE CONTRACTOR.
- 2. PIPING LAYOUT IS DIAGRAMMATIC ONLY. FINAL ARRANGEMENT WILL BE SITE SPECIFIC. CONTRACTOR WILL BE RESPONSIBLE FOR FIELD VERIFICATION AND COORDINATING ACTUAL LOCATION WITH ALL OTHER TRADES.
- 3. CONTRACTOR SHALL VERIFY MOTOR VOLTAGE, PHASE, AND AMP RATINGS BEFORE STARTING ELECTRICAL INSTALLATION; AND MAKE CERTAIN THE VOLTAGE SUPPLIED BY THE FACILITY IS THE SAME.
- THE ROOM REQUIRES DEDICATED MECHANICAL VENTILATION WITH AN ALLOWABLE TEMPERATURE VARIANCE OF 40° TO 105°. (FOR HIGHER AMBIENTS, CONSULT FACTORY).
- 5. ALLOW 36 INCHES IN FRONT OF CONTROL PANEL FOR MAINTENANCE AND VENTILATION, ALL OTHER SIDES REQUIRE 24 INCHES OF CLEARANCE.
- 6. ALL ACCESSORIES, PIPE, AND FITTINGS BEYOND DISCHARGE PORTS ARE SUPPLIED AND INSTALLED BY OTHERS.

SOURCE VALVE-BY OTHERS

➤ TO FACILITY

FOR DISCHARGE PIPE SIZING REFER TO STANDARD PRESSURE DROP TABLES. - TOTAL PRESSURE DROP SHOULD

BE LESS THAN 5 PSIG.

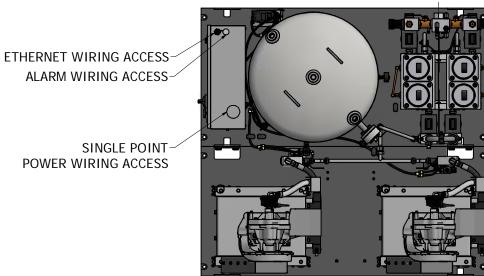



DISCHARGE-CONNECTION

NO FOUNDATION OR INERTIA PAD IS REQUIRED

NO VIBRATION PADS ARE ¬ NECESSARY AT THIS LOCATION

-SINGLE POINT DRAIN CONNECTION, CONTRACTOR SHALL PIPE TO FLOOR DRAIN

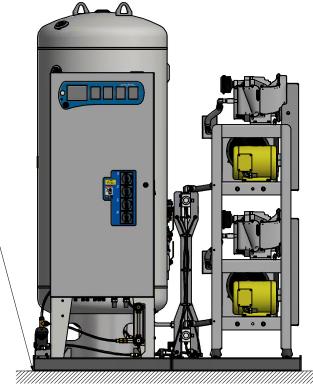

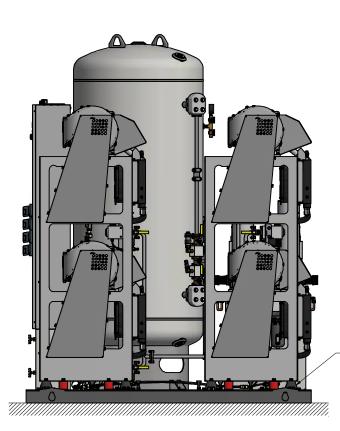

NOTE: ALL ACCESSORIES, PIPE, AND FITTINGS BEYOND INLET AND DISCHARGE PORTS ARE SUPPLIED AND INSTALLED BY OTHERS.

-HEAVY-DUTY 4-POINT ISOLATION (SEISMIC OPTIONAL)

(HOUSEKEEPING PAD IS OPTIONAL)

INST DIA - LAB AIR QX SCROLL SPC 5-7.5HP 10 BAR W/ DESC BM190343 DRYFR

(5HP WITH 200 GALLON RECEIVER SHOWN)