



A

GENERAL

18. NO FOUNDATION OR INERTIA PAD IS REQUIRED. NO VIBRATION PADS ARE REQUIRED. HOUSEKEEPING PAD IS OPTIONAL.



QUICK CONNECT FITTING TO BE
USED WITH Ø8 [5/16 in] TUBE
AUTOMATIC DRAIN OUTLET

A

D

This drawing and the information contained thereon remain the property of BeaconMedaes and may not be used for other than the purpose for which it is loaned without the expressed written permission from BeaconMedaes Engineering.

LINE KEY

SUPPLIED BY BEACONMEDAES	
24V AC
CAN COMMUNICATION CABLE

SUPPLIED BY OTHERS	
CONDENSATE DRAIN	- - - - -
COPPER TUBE	_____

SOURCE VALVE
BY OTHERS






MAIN PRESSURE GAUGE
BY OTHERS


HIGH-LOW
PRESSURE SWITCH
BY OTHERS

TO FACILITY
(SEE NOTE 10)

TO WASTE DRAIN
(SEE NOTE 12)

ANCHOR BOLT LOCATIONS

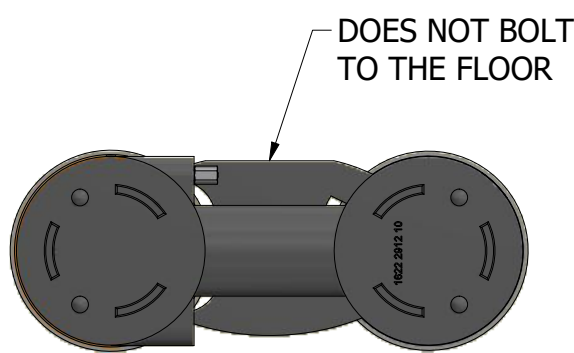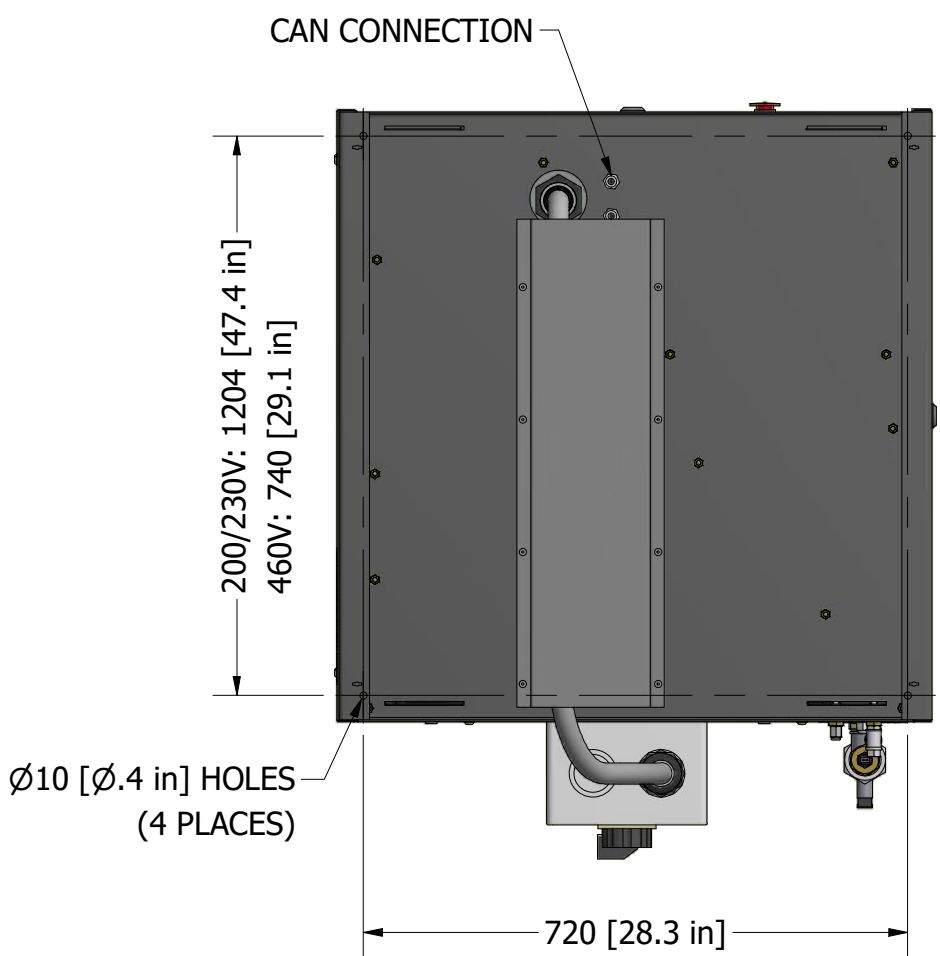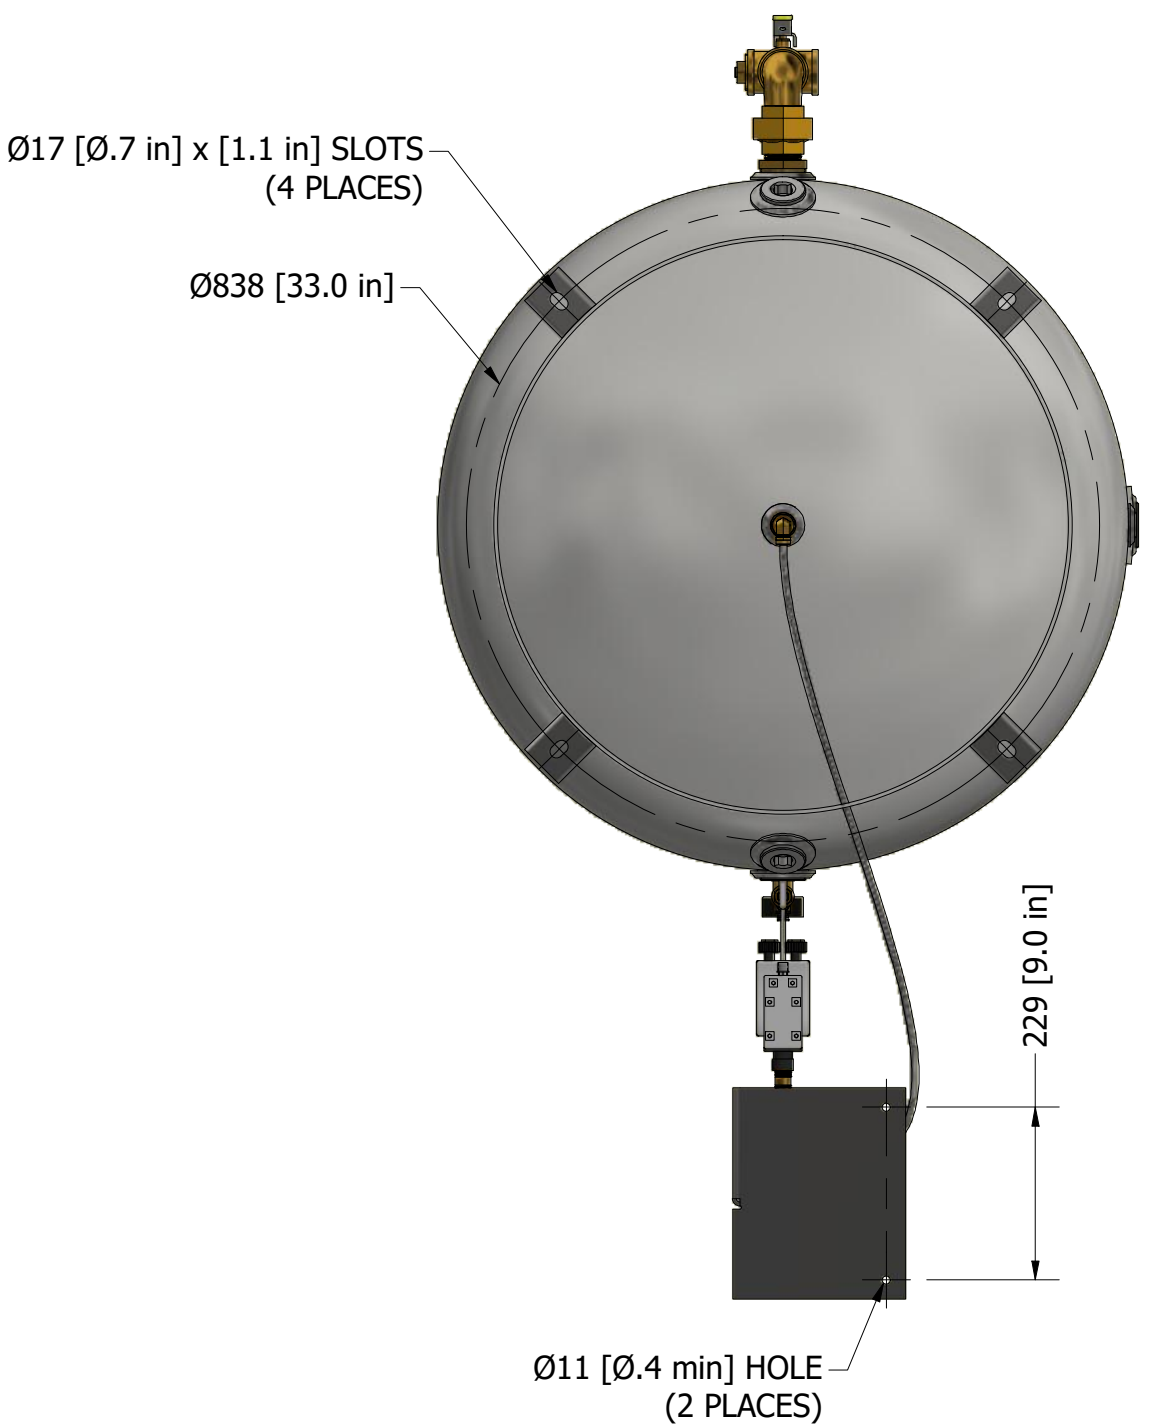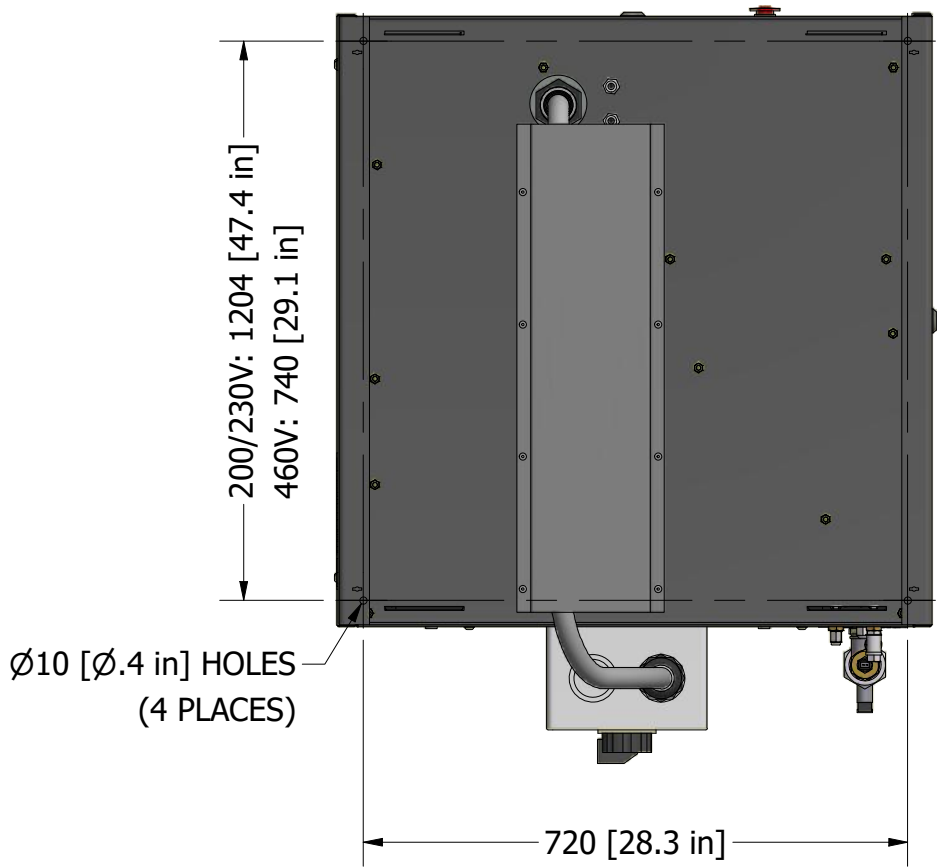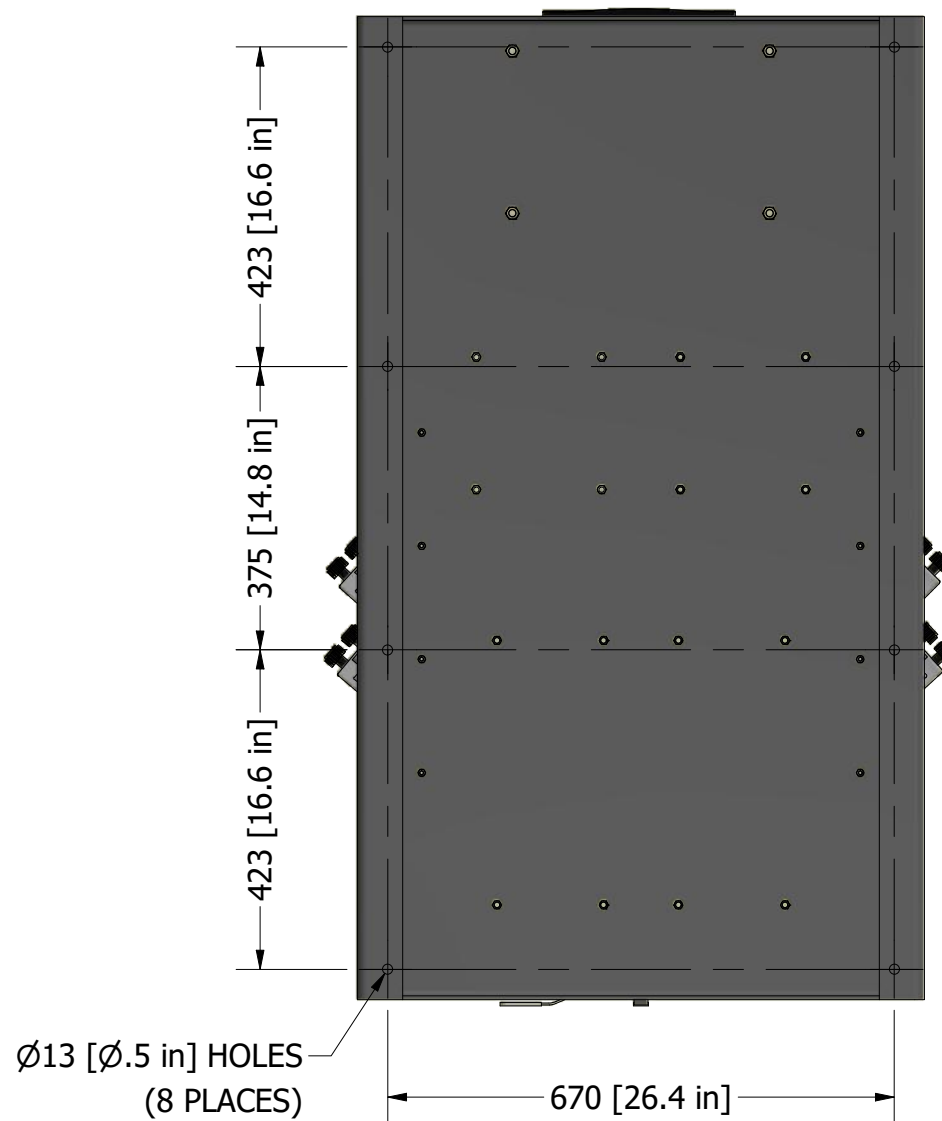

INSPECTION CHECKLIST UNLESS OTHERWISE SPECIFIED: <div><div></div><div></div></div> ALL ITEMS MARKED BY ONE OF THE ABOVE SYMBOLS ARE TO BE INSPECTED EQUIPMENT TO BE USED DURING RECEIVING INSPECTION SHALL BE PER QUALITY SYSTEM PROCEDURES	Revised: GTM	Date: 3/25/2022	Drawn: SMB	Date: 12/12/2019	
	 BEACONMEDICS	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: XXX ± .10 XXX ± .005			Scale: NTS
		Description: DWG INST DX 25-30HP INSTRUMENT AIR MODULAR			Drawing Number: 4107 8572 19
		DN: HOP200346			
			Sheet 2 of 2	Rev: 02 <small>DO NOT SCALE THIS DOCUMENT</small>	